


IDEALPLUSING®

DC DC Converter

IPS-DTD24S482

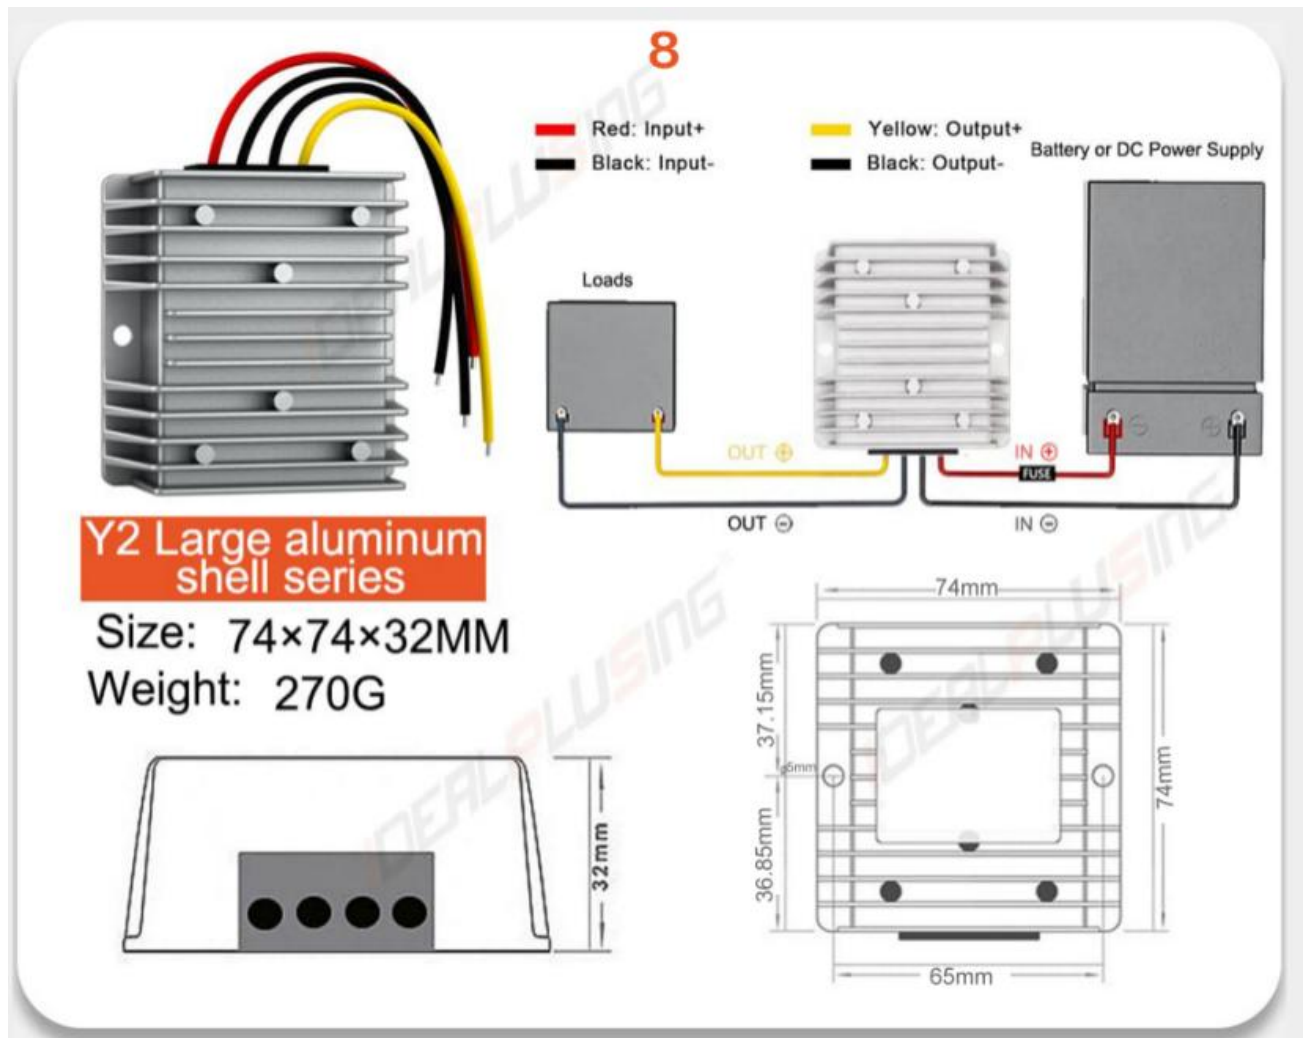

Technical Performance		Technical Index	
Brand	IDEALPLUSING		
Type	NON-Isolated		
Name	Boost Non Isolate DC DC Converter		
Model	IPS-DTD24S482		
DC Voltage Input			
Input Voltage rate	24VDC		
Input Voltage range	15-30VDC		
DC Voltage & Current Output			
Output Voltage rate	48VDC		
Output Current	2AMPS		
Output Rate Power	96Watts		
Converter Size	74*74*32(MM)		
NW	300G		
Others			
Customize	Allow		
Material of shell	Aluminum		
Working temp	-25~85℃		
Efficiency	93%		
Waterproof Level	IP67		
Protection function	Input instant over-voltage/ Output over current / Chip over-heat protection		
Customize	From 1-200A Size and weight different if current different		